



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS						
REV.	DESCRIPTION	ECO	DATE	APPROVED			
В	ADD ISOMETRIC VIEW	18-010	11/14/18	P.T			



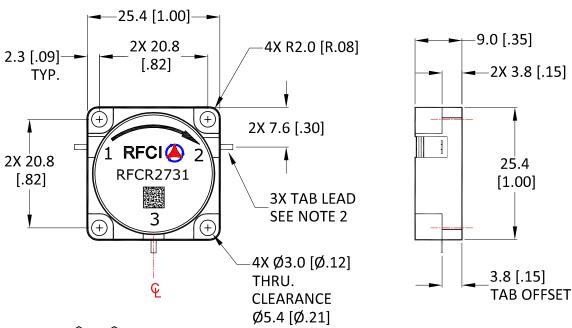



## Terminal:

Port (1)-(2): Input-Output

Port (2)-(3) Port (3)-(1)

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1980		2520
Insertion Loss: 1 to 2 (dB)		< .35	.40
Isolation: 2 to 1 (dB)	18	>20	
Return Loss (dB)	18	>20	

## Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 1.00 [.040]W x 3.0[.12]L x 0.20[.008]T
- S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

## Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	1000/200 Watts	
Reverse Power CW	200 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

Permanent damage to the Device or reduce reliability if exceeding any of the limits.

Port (1),(2)and (3): DC connected and floating as the only ground connection.

CW CIRCULATOR MODEL: RFCR2731

