

I.R.


10/20/14

P.T



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL

TO THE		
DALIC		
RoHS		
2002/95/EC 📝		

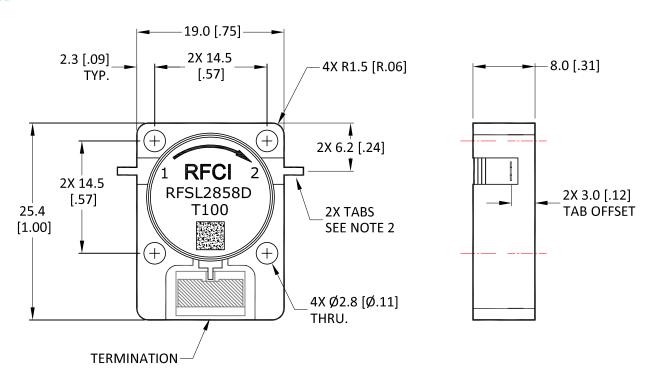

INITIAL RELEASE

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	3300		3500
Insertion Loss (dB)		< .20	.30
Isolation (dB)	22	> 25	
Return Loss (dB)	22	> 25	

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: $1.00 [.040]W \times 3.0[.12]L \times 0.20[.008]T$
- 3. Isolator Flange held to $+85^{\circ}\text{C}$; 30 Minute Maximum Duration

Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	1000/100 Watts
Reverse Power CW	100 Watts
Termination Rating (See Note 3)	150 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

CW ISOLATOR MODEL: RFSL2858D-T100

