
DWG. NO.
SL2860-OS
SHT REV
1 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
Α	INITIAL RELEASE	I.R.	04/13/15	P.T



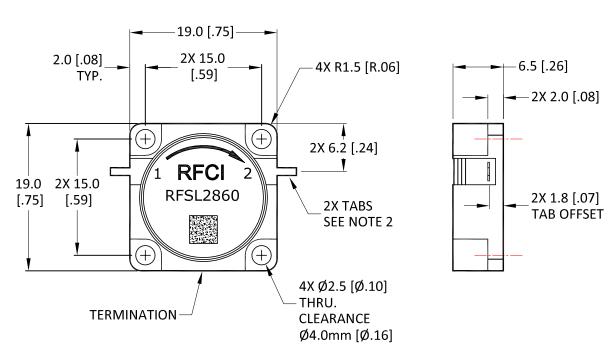

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	3400		3700
Insertion Loss (dB)		< .20	.30
Isolation (dB)	22	> 25	
Return Loss (dB)	22	> 25	

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 1.00 [.040]W x 3.0[.12]L x 0.20[.008]T
- 3. Isolator Flange held to +85°C; 30 Minute Maximum Duration

Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	1000/100 Watts		
Reverse Power CW	20 Watts		
Termination Rating (See Note 3)	20 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

CW ISOLATOR MODEL: RFSL2860

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION		DECL (A)				
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° 2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS 16	APPROVALS	DATE			TUI 🦞		
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY:						
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI \$46.1	CHECKED BY:		TITLE				
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:		OUTLINE/SPECS				
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY:		OUTLINE/OF LOS				
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE	MFG. ENGR.		SIZE	CAGE NO.	DWG NO.		TREV.
DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.				SL2860-OS		Δ
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		Α	'	SL2860-	.05	^
DO NOT SCALE DRAWING			SCALE: FULL			SHEET 1 OF 1	