
DWG. NO. SL2179-T100-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

REVISIONS					
REV.	DESCRIPTION	ECO	DATE	APPROVED	
Α	INITIAL RELEASE	I.R.	12/12/14	P.T	



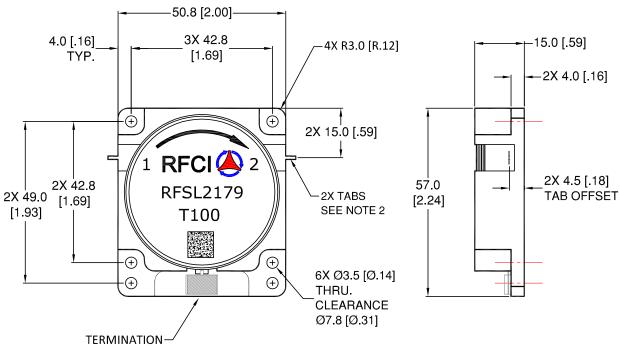

Specifications

Minimum	Typical	Maximum
220		280
	< .50	.70
17	> 19	
17	> 19	
	220 17	220 < .50 17 > 19

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	1000/200 Watts	
Reverse Power CW	100 Watts	
Termination Rating (See Note 3)	150 Watts	
Operating Temperature	-20 to +85° C	
Storage Temperature	-40 to +95° C	

Notes

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 1.00 [.040]W x 3.0 [.12]L x 0.20 [.008]T
- 3. Isolator Flange held to +85°C; 30 Minute Maximum Duration

CW 200W ISOLATOR MODEL: RFSL2179-T100

