
DWG. NO.
 SL2333-T200-OS
 SHT
 REV

 1
 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
Α	INITIAL RELEASE	I.R.	03/05/15	P.T



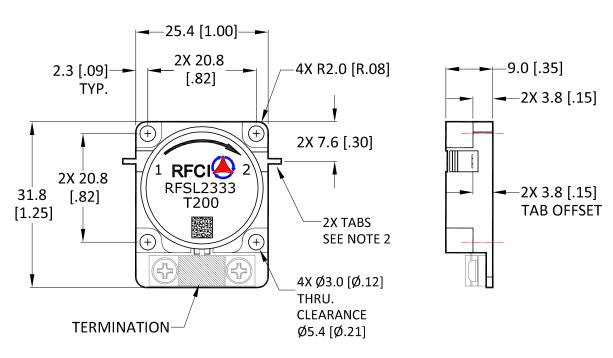

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1020		1090
Insertion Loss (dB)		< .20	.30
Isolation (dB)	22	>25	
Return Loss (dB)	22	>25	

## Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 1.00 [.040]W x 3.0[.12]L x 0.20[.008]T
- 3. Isolator Flange held to +85°C; 30 Minute Maximum Duration

## Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	1000/200 Watts	
Reverse Power CW	200 Watts	
Termination Rating (See Note 3)	200 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

CW ISOLATOR MODEL: RFSL2333-T200

