


THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

REVISIONS				
REV.	DESCRIPTION	ECO	DATE	APPROVED
A	INITIAL RELEASE	I.R.	04/15/15	P.T

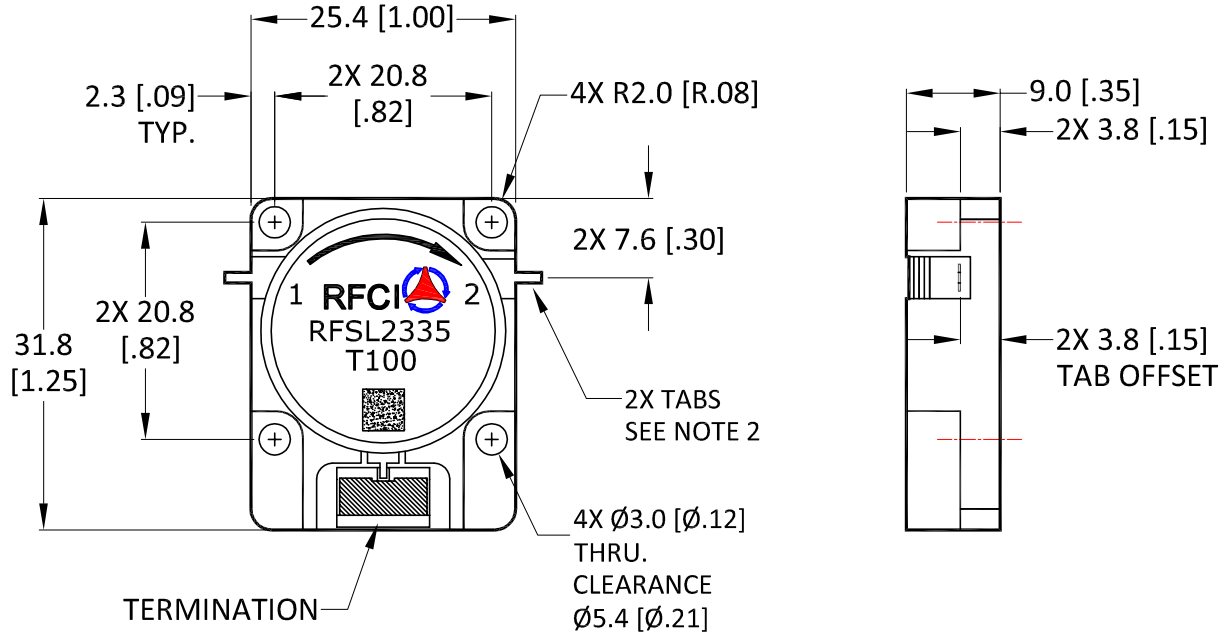

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1165		1215
Insertion Loss (dB)		< .20	.30
Isolation (dB)	22	>25	
Return Loss (dB)	22	>25	

- Notes:
1. Typical Values Represent Performance @ +23 °C.
 2. Tab Dimensions: 1.00 [0.040]W x 3.0[0.12]L x 0.20[0.008]T
 3. Isolator Flange held to +85°C; 30 Minute Maximum Duration

Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	1000/200 Watts
Reverse Power CW	100 Watts
Termination Rating (See Note 3)	150 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

CW ISOLATOR MODEL: RFSL2335-T100

<p>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]:</p> <p>TOLERANCES ARE: 1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° 2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS 16/</p> <p>REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5</p> <p>PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RF CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."</p> <p>DO NOT SCALE DRAWING</p>	<p>THIRD ANGLE PROJECTION</p>	<h1 style="margin: 0;">RFCI</h1> <h2 style="margin: 10px 0 0 0;">OUTLINE/SPECS</h2>																																				
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:50%;">APPROVALS</th> <th style="width:50%;">DATE</th> </tr> <tr> <td>DRAWN BY:</td> <td></td> </tr> <tr> <td>CHECKED BY:</td> <td></td> </tr> <tr> <td>DESIGN BY:</td> <td></td> </tr> <tr> <td>ENGINEER BY:</td> <td></td> </tr> <tr> <td>MFG. ENGR.</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> <tr> <td>PROG. MGMT/MKT</td> <td></td> </tr> </table>	APPROVALS	DATE	DRAWN BY:		CHECKED BY:		DESIGN BY:		ENGINEER BY:		MFG. ENGR.		Q.A.		PROG. MGMT/MKT		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="4">TITLE</td> </tr> <tr> <td colspan="4" style="text-align: center; font-size: 1.2em;">OUTLINE/SPECS</td> </tr> <tr> <td style="width:15%;">SIZE</td> <td style="width:15%;">CAGE NO.</td> <td style="width:40%;">DWG NO.</td> <td style="width:10%;">REV.</td> </tr> <tr> <td style="text-align: center;">A</td> <td></td> <td style="text-align: center;">SL2335-T100-OS</td> <td style="text-align: center;">A</td> </tr> <tr> <td colspan="2">SCALE: FULL</td> <td colspan="2" style="text-align: right;">SHEET 1 OF 1</td> </tr> </table>		TITLE				OUTLINE/SPECS				SIZE	CAGE NO.	DWG NO.	REV.	A		SL2335-T100-OS	A	SCALE: FULL		SHEET 1 OF 1	
APPROVALS	DATE																																					
DRAWN BY:																																						
CHECKED BY:																																						
DESIGN BY:																																						
ENGINEER BY:																																						
MFG. ENGR.																																						
Q.A.																																						
PROG. MGMT/MKT																																						
TITLE																																						
OUTLINE/SPECS																																						
SIZE	CAGE NO.	DWG NO.	REV.																																			
A		SL2335-T100-OS	A																																			
SCALE: FULL		SHEET 1 OF 1																																				