

DWG. NO. REV SL2336-T100-OS

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

REVISIONS							
REV.	DESCRIPTION	ECO	DATE	APPROVED			
A	INITIAL RELEASE	I.R.	04/15/15	P.T			



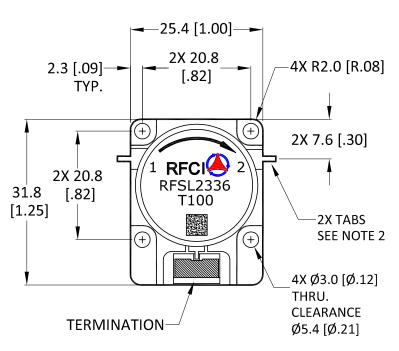



## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	960		1215
Insertion Loss (dB)		< .40	.50
Isolation (dB)	17	>20	
Return Loss (dB)	17	>20	

- 1. Typical Values Represent Performance @ +23 °C.
  2. Tab Dimensions: 1.00 [.040]W x 3.0[.12]L x 0.20[.008]T
  3. Isolator Flange held to +85°C; 30 Minute Maximum Duration

## Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	1000/200 Watts
Reverse Power CW	100 Watts
Termination Rating (See Note 3)	150 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

CW ISOLATOR MODEL: RFSL2336-T100

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION	<del>]</del>	DECL (A)			
1 PLACE DECIMAL ±.2 [±.01] 2 PLACE DECIMAL ±.10 [±.004] ANGULAR: ±1.0° SURFACE ROUGHNESS 16	APPROVALS	DATE				
REMOVE ALL BURRS AND BREAK SHARP EDGES.	DRAWN BY:					
SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY:		TITLE			
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:		OUTLINE/SPECS			
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY:					
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR.		SIZE CAGE NO. DWG NO.			REV.
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.		A		00-OS	\`` <b>\</b>
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		<b>1</b> A	SL2336-1		
DO NOT SCALE DRAWING			SCALE: FULL		SHEET 1 OF 1	
		_				