
DWG. NO. SL2707-T100-OS


REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM, CHANGES SHALL DO NOT REVISE MANUALLY.

REVISIONS						
	REV. DESCRIPTION		ECO	DATE	APPROVED	
	Α	INITIAL RELEASE	I.R.	04/15/15	P.T	



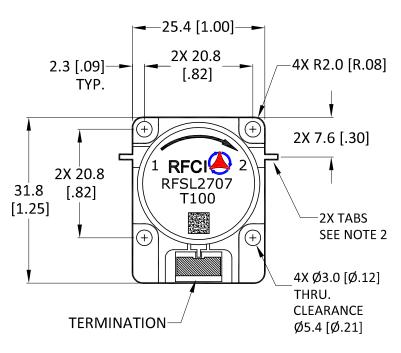



Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2000		2300
Insertion Loss (dB)		< .25	.35
Isolation (dB)	20	>23	
Return Loss (dB)	20	>23	

- 1. Typical Values Represent Performance @ +23 °C.
 2. Tab Dimensions: 1.00 [.040]W x 3.0[.12]L x 0.20[.008]T
- 3. Isolator Flange held to +85°C; 30 Minute Maximum Duration

Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	1000/200 Watts		
Reverse Power CW	100 Watts		
Termination Rating (See Note 3)	150 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

CW ISOLATOR MODEL: RFSL2707-T100

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION]	RECI (A)				
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16/	APPROVALS	DATE					
REMOVE ALL BURRS AND BREAK SHARP EDGES.	DRAWN BY:		1				
SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY:		TITLE				
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:		OUTLINE/SPECS				
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR	ENGINEER BY:						
INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR.		SIZE CAGE NO. DWG NO.			TREV.	
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.						1
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		A		SL2/0/-	1100-05	00-OS A
DO NOT SCALE DRAWING			SCALE	≣: FULL		SHEET 1 OF 1	