



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.


DO NOT REVISE MANUALLY

L		REVISIONS				
	REV.	DESCRIPTION	ECO	DATE	APPROVED	
	В	ADD ISOMETRIC VIEW	18-010	11/14/18	P.T	



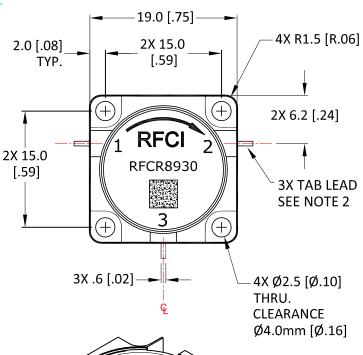

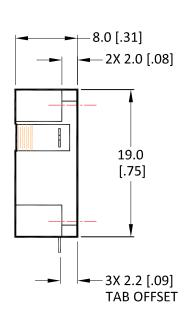



Terminal:

Port (1)-(2): Input-Output

Port (2)-(3) Port (3)-(1)

Body Housing: Steel, Nickel plated Tab Lead: Be-Cu, Silver plated

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	7500		15000
Insertion Loss: In-Out (dB)		< 0.60	0.70
Isolation: Out-In (dB)	17	> 19	
Return Loss (dB)	17	> 19	

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 0.60 [.024]W x 2.0[.08]L x 0.20[.008]T
- S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	250/30 Watts
Reverse Power CW	20 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

Permanent damage to the Device or reduce reliability if exceeding any of the limits.

Port (1),(2)and (3): DC connected and floating as the only ground connection.

CW CIRCULATOR MODEL: RFCR8930

