


DWG. NO.

REV



ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

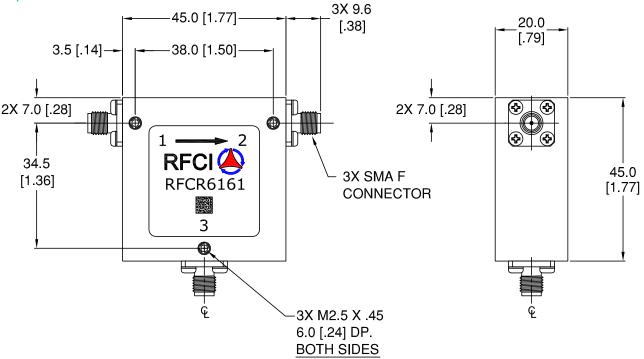

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	380		430
Insertion Loss (dB)		< .30	.40
Isolation (dB)	20	> 23	
Return Loss (dB)	20	> 23	

Note: typical Values Represent Mid-Band Performance @ +23 °C.

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	2.5K/250 Watts	
Reverse Power CW	250 Watts	
Operating Temperature	-20 to +85° C	
Storage Temperature	-40 to +95° C	

SMAf CIRCULATOR MODEL: RFCR6161

