DWG. NO.

CR6854-OS

REVISIONS

REVISIONS


APPROVIDED


THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

DO NOT BEVISE MANIBLLY.

		REVISIONS			
R	REV.	DESCRIPTION	ECO	DATE	APPROVED
	1	INITIAL RELEASE	I.R.	08/26/13	P.T



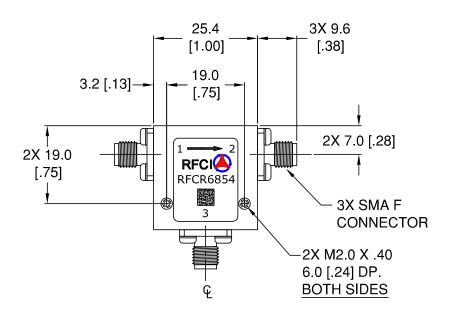

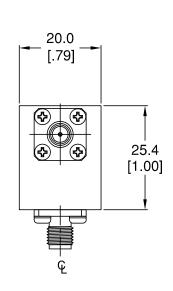

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2700		3100
Insertion Loss (dB)		< .30	.40
Isolation (dB)	20	> 23	
Return Loss (dB)	20	> 23	

Note: Typical Values Represent Mid-Band Performance @ +23 °C.

## Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	2.0K/200 Watts	
Reverse Power CW	200 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

## SMAf CIRCULATOR MODEL: RFCR6854

