



DWG. NO.

REV

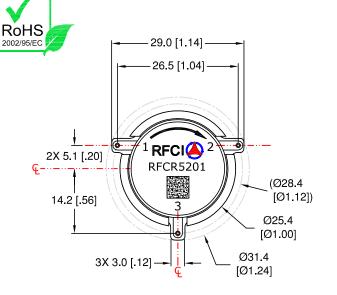

ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

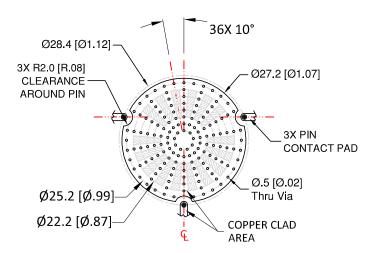

SolderMask Pattern

Ø25.4 [1.00] 8.5 [.33] 3X PIN Ø23.5 [.93] SEE FINISH 3X Ø1.2 [.05]

Recommended Footprint Copper-SolderMask Pattern

The Land Pattern should be with good thermal conductivity

Finish:

- 1. Housing: Silver plated 2. Pin: Gold plated
- 3. Coplanarity specification: 0.10 [.004] MAX.

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	869		894
Insertion Loss (dB)		< .22	.30
Isolation (dB)	20	> 23	
Return Loss (dB)	20	> 23	
FWD IMD: 2T at 37W per T 5MHz Spacing (dBc)		75	

Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	500/100 Watts
Reverse Power CW	100 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-50 to +125° C

NOTES:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW SMD CIRCULATOR MODEL: RFCR5201

UNLESS OTHERWISE SPECIFIED THIRD ANGLE PROJECTION ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): \leftarrow ((+) RFCI TOLERANCES ARE: 1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° **APPROVALS** DATE 2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS 16/ REMOVE ALL BURRS AND BREAK SHARP EDGES.
SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5 CHECKED BY: TITLE PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT **OUTLINE/SPECS** IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE ENGINEER BY: CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES. THIS INFORMATION FOR COLD.

THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO CAGE NO. DWG NO. REV. DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL." Α CR5201-OS Α DO NOT SCALE DRAWING SHEET 1 OF 1 SCALE: FULL