



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
Α	INITIAL RELEASE	I.R.	08/01/15	P.T



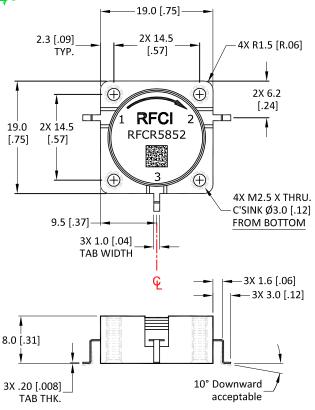

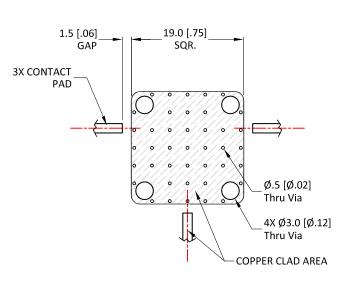

Recommended Footprint

The Land Pattern should be with good thermal conductivity

Finish:

Housing: Nickel plated Tabs: Silver plated

Coplanarity specification: 0.10 [.004] MAX.

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2320		2370
Insertion Loss (dB)		< .25	.30
Isolation (dB)	20	>23	
Return Loss (dB)	20	>23	

Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	500/100 Watts
Reverse Power CW	80 Watts
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +95° C

Notes

- 1. Typical Values Represent Performance @ +23 °C.
- 2. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW GW SMD CIRCULATOR MODEL: RFCR5852

