



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

REVISIONS							
REV.	DESCRIPTION	ECO	DATE	APPROVED			
Α	INITIAL RELEASE	I.R.	08/02/15	P.T			



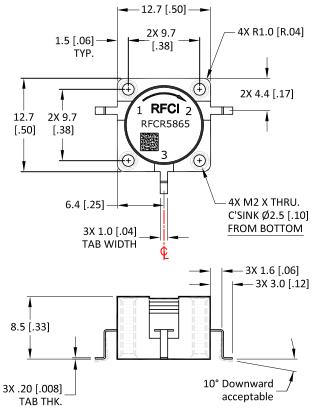

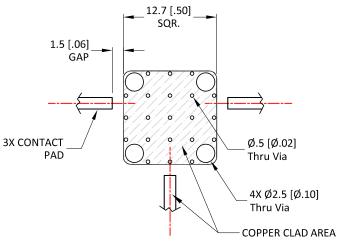

## Recommended Footprint

The Land Pattern should be with good thermal conductivity

Finish:

Housing: Nickel plated

Tabs: Silver plated Coplanarity specification: 0.10 [.004] MAX.

## **Specifications**

Parameter	Minimum	Typical	Maximum	
Frequency Range (MHz)	2550		2650	
Insertion Loss (dB)		< .25	.35	
Isolation (dB)	20	>22		
Return Loss (dB)	20	>22		

## Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	500/50 Watts		
Reverse Power CW	50 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

## Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW GW SMD CIRCULATOR MODEL: RFCR5865

THIRD ANGLE PROJECTION		DECL (A)				
APPROVALS	DATE	1				
DRAWN BY:						
CHECKED BY:		TITLE				
DESIGN BY:		OUTLINE/QDECQ				
ENGINEER BY:		OUTLINE/SI EUS				
MFG. ENGR.		CIZE CACE NO. DWO NO.			TREV.	
Q.A.		A CAGE NO.		CR5865-OS		Λ.
PROG. MGMT/MKT						A
		SCALE	: FULL		SHEET 1 OF 1	·
	APPROVALS  DRAWN BY: CHECKED BY: DESIGN BY: ENGINEER BY: MFG. ENGR. Q.A.	APPROVALS DATE  DRAWN BY: CHECKED BY: DESIGN BY: ENGINEER BY: MFG. ENGR. Q.A.	APPROVALS DATE  DRAWN BY:  CHECKED BY:  DESIGN BY:  ENGINEER BY:  MFG. ENGR.  Q.A.  PROG. MGMT/MKT  ATTILE	APPROVALS DATE  DRAWN BY:  CHECKED BY:  DESIGN BY:  ENGINEER BY:  MFG. ENGR.  Q.A.  PROG. MGMT/MKT   DATE  TITLE  OI  SIZE CAGE NO.  A	APPROVALS DATE  DRAWN BY:  CHECKED BY:  DESIGN BY:  ENGINEER BY:  MFG. ENGR.  Q.A.  PROG. MGMT/MKT   CRECK  RFC  DATE  RFC  OUTLINE/S  OUTLINE/S  OUTLINE/S  OUTLINE/S  CRECK  CR	APPROVALS DATE  DRAWN BY: CHECKED BY: DESIGN BY: ENGINEER BY: MFG. ENGR. Q.A. PROG. MGMT/MKT  RFC  OUTLINE/SPECS  SIZE CAGE NO. A CR5865-OS