


THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM, CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

	REVISIONS			
REV.	REV. DESCRIPTION		DATE	APPROVED
Α	INITIAL RELEASE	I.R.	08/05/15	P.T



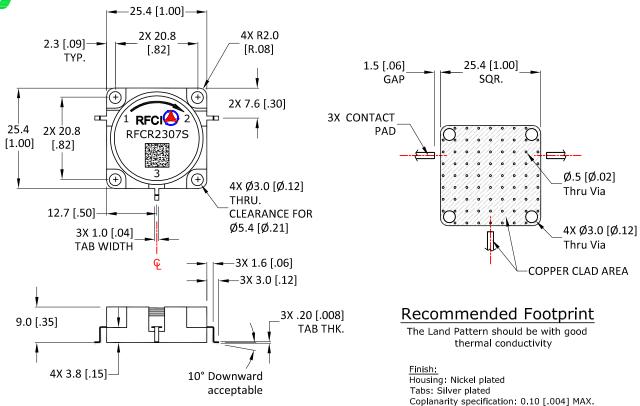

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1020		1090
Insertion Loss (dB)		< .22	.30
Isolation (dB)	20	> 23	
Return Loss (dB)	20	> 23	

Parameter	Maximum			
Forward PWR Peak/AVG	500/100 Watts			
Reverse Power CW	100 Watts			
Operating Temperature	-40 to +85° C			
Storage Temperature	-40 to +95° C			

Power & Temperature Ratings

- 1. Typical Values Represent Performance @ +23 °C.
- 2. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW GW SMD CIRCULATOR MODEL: RFCR2307S

UNLESS OTHERWISE SPECIFIED	THIRD ANGLE PROJECTION							
ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	$\oplus \ominus$							
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16/	APPROVALS	DATE						
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY:							
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI 846.1	CHECKED BY:		TITLE					
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:		OUTLINE/SPECS					
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR	ENGINEER BY:		OUTLINE/OF LOO					
INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR.		CIZE	SIZE CAGE NO. DWG NO.				REV.
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.			CAGL NO.		070	00	\\_\^
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		Α		CR2307S-OS		A	
DO NOT SCALE DRAWING			SCALE: FULL				SHEET 1 OF 1	