
DWG. NO. SL9116-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

REVISIONS						
REV.	DESCRIPTION	ECO	DATE	APPROVED		
Α	INITIAL RELEASE	I.R.	10/15/15	P.T		



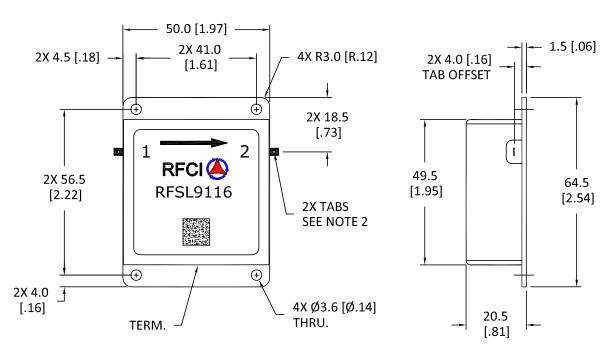

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	132		174
Insertion Loss (dB)		< .80	1.0
Isolation (dB)	15	> 16	
Return Loss (dB)	15	> 16	

## Notes:

- 1. Typical Values Represent Performance @ +23 °C
- 2. Tab Dimensions: 2.5 [.10]W x 3.0[.12]L x 0.30[.012]T
- 3. Isolator Flange held to +80°C; 30 Minute Maximum Duration.

## Power & Temperature Ratings

Parameter	Maximum	
Forward PWR AVG	100 Watts	
Reverse Power CW	20 Watts	
Termination Rating (See Note 3)	20 Watts	
Operating Temperature	-30 to +80° C	
Storage Temperature	-40 to +95° C	

20W ISOLATOR MODEL: RFSL9116

