
DWG. NO.
 SL8501-OS
 SHT
 REV

 1
 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
Α	INITIAL RELEASE	I.R.	04/24/15	P.T



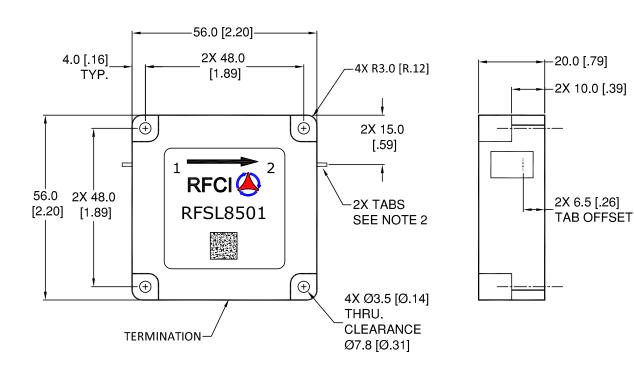

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1250		2500
Insertion Loss (dB)		< .50	.70
Isolation (dB)	17	> 19	
Return Loss (dB)	17	> 19	

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 1.00 [.040]W x 3.0[.12]L x 0.20[.008]T
- 3. Isolator Flange held to +50°C; 30 Minute Maximum Duration.

Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	500/50 Watts		
Reverse Power CW	20 Watts		
Termination Rating (See Note 3)	50 Watts		
Operating Temperature	-0 to +50° C		
Storage Temperature	-40 to +95° C		

CW ISOLATOR MODEL: RFSL8501

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION					
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° 2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS 16/	APPROVALS	DATE	\mathbf{R}			
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI 846.1	DRAWN BY:					
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY:					
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:					
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY:		OUTLINE/SPECS			
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE	MFG. ENGR.		SIZE CAGE NO.	DWG NO.		IREV.
DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.				501 OC	Δ
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		A	SLOS	501-OS	
DO NOT SCALE DRAWING			SCALE: FULL		SHEET 1 OF	1
		_				