DWG. NO. SL8503-OS

2X 10.0 [.39]


2X 6.5 [.26]

TAB OFFSET

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

REVISIONS					
REV.	DESCRIPTION	ECO	DATE	APPROVED	
Α	INITIAL RELEASE	I.R.	04/24/15	P.T	



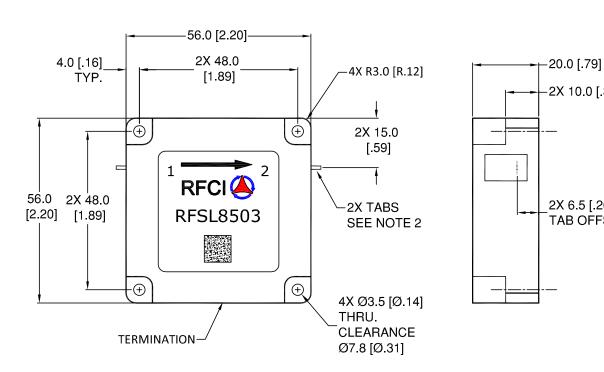

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1300		2600
Insertion Loss (dB)		< .50	.70
Isolation (dB)	17	> 19	
Return Loss (dB)	17	> 19	

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 1.00 [.040]W x 3.0[.12]L x 0.20[.008]T
- 3. Isolator Flange held to +50°C; 30 Minute Maximum Duration.

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	500/50 Watts	
Reverse Power CW	20 Watts	
Termination Rating (See Note 3)	50 Watts	
Operating Temperature	-0 to +50° C	
Storage Temperature	-40 to +95° C	

CW ISOLATOR MODEL: RFSL8503

THIRD ANGLE PROJECTION						
THIRD ANGLE PROJECTION						
APPROVALS	DATE		K			
DRAWN BY:						
CHECKED BY:						
DESIGN BY:		OUTLINE/ODEOC				
ENGINEER BY:		OUTLINE/SPECS				
		SIZE	CAGE NO	DWG NO		TREV.
Q.A.			orial No.		12 06	Δ
PROG. MGMT/MKT		_ ^		SLOOK	503-05	
DO NOT SCALE DRAWING		SCALE	: FULL		SHEET 1 OF 1	
(E	DRAWN BY: CHECKED BY: DESIGN BY: ENGINEER BY: MFG, ENGR.	DRAWN BY: CHECKED BY: DESIGN BY: ENGINEER BY: MFG, ENGR.	DESIGN BY: DESIGN BY: ENGINEER BY: WFG, ENGR. DAA. SIZE A	DESIGN BY: DESIGN BY: ENGINEER BY: WFG, ENGR. D.A. PROG, MGMT/MKT SIZE CAGE NO. A	DESIGN BY: DESIGN BY: ENGINEER BY: DESIGN BY: SIZE CAGE NO. A SL850	DESIGN BY: DESIGN BY: ENGINEER BY: AA. PROG. MGMT/MKT OUTLINE/SPECS SIZE CAGE NO. DWG NO. SL8503-OS