DWG. NO.


SL8815-OS


SHT REV
1 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
Α	INITIAL RELEASE	I.R	04/11/15	P.T



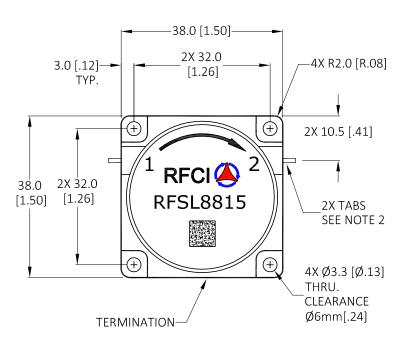

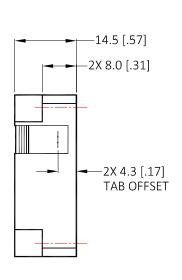

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2000		3000
Insertion Loss (dB)		< .40	.50
Isolation (dB)	20	> 21	
Return Loss (dB)	20	> 21	

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: $1.00 [.040]W \times 3.0[.12]L \times 0.20[.008]T$
- 3. Isolator Flange held to $+85^{\circ}\text{C}$; 30 Minute Maximum Duration.

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	500/50 Watts	
Reverse Power CW	20 Watts	
Termination Rating (See Note 3)	20 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

CW ISOLATOR MODEL: RFSL8815

