DWG. NO.


CR2220-OS

SHT REV
1 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS						
RE	DESCRIPTION	ECO	DATE	APPROVED			
Α	INITIAL RELEASE	I.R.	19/15/13	P.T			



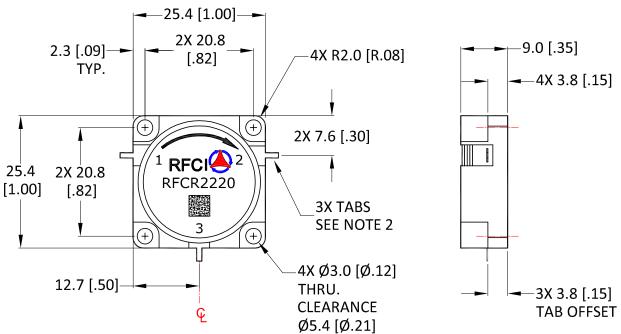

## Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	869		894
Insertion Loss (dB)		< .20	.30
Isolation (dB)	22	>25	
Return Loss (dB)	22	>25	
FWD IMD: 2T at 37W per T 5MHz Spacing (dBc)		75	

## Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	1000/200 Watts	
Reverse Power CW	200 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

## Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 1.00 [.040]W x  $3.0[.12]L \times 0.20[.008]T$
- S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW CIRCULATOR MODEL: RFCR2220

