


THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

REVISIONS						
RE	V. DESCRIPTION	ECO	DATE	APPROVED		
Α	INITIAL RELEASE	I.R.	05/06/14	P.T		



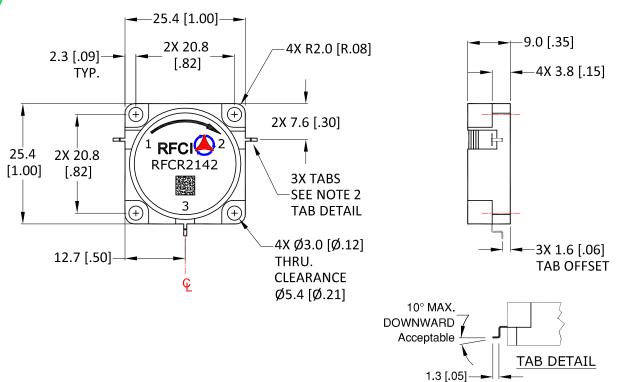

Specifications

Parameter	Minimum	Typical	Maximum	
Frequency Range (MHz)	728		756	
Insertion Loss (dB)		< .20	.30	
Isolation (dB)	22	>25		
Return Loss (dB)	22	>25		
FWD IMD: 2T at 37W per T 5MHz Spacing (dBc)		75		

Power & Temperature Ratings

Parameter	Maximum			
Forward PWR Peak/AVG	1000/200 Watts			
Reverse Power CW	200 Watts			
Operating Temperature	-40 to +85° C			
Storage Temperature	-40 to +95° C			

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 0.64 [.025]W x 3.0[.12]L x 0.20[.008]T
- 3. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW GW-CIRCULATOR MODEL: RFCR2142

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]: TOLERANCES ARE:	THIRD ANGLE PROJECTION	1	DECL (A)					
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16/	APPROVALS	DATE						
REMOVE ALL BURRS AND BREAK SHARP EDGES.	DRAWN BY:							
SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY:		TITLE					
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:		OUTLINE/SPECS					
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR	ENGINEER BY:		OUTLINE/SPECS					
INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR.		0175	CIZE CACE NO. DWO NO.			REV.	
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.		SIZE	CAGE NO.	DWG NO.			NEV.
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		Α		CR2142-		OS F	
DO NOT SCALE DRAWING			SCALE: FULL				SHEET 1 OF 1	