






THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL

\neg		REVISIONS						
	REV.	DESCRIPTION	ECO	DATE	APPROVED			
	Α	INITIAL RELEASE	I.R.	05/06/14	P.T			
	<u> </u>							



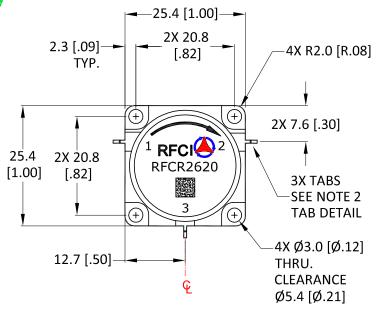

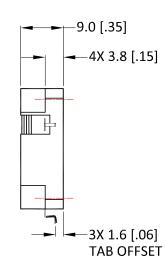



Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1800		2015
Insertion Loss (dB)		< .25	.35
Isolation (dB)	20	>23	
Return Loss (dB)	20	>23	
FWD IMD: 2T at 37W per T 5MHz Spacing (dBc)		75	

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	1000/200 Watts	
Reverse Power CW	200 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 0.64 [.025]W x 3.0[.12]L x 0.20[.008]T
- 3. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW GW-CIRCULATOR MODEL: RFCR2620

