




THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

REVISIONS						
REV.	DESCRIPTION	ECO	DATE	APPROVED		
В	ADD ISOVIEW	20-003	03/30/20	P.T		

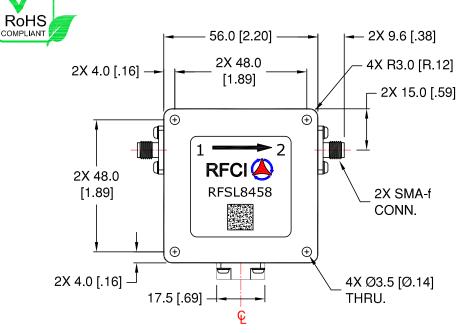





Finish:

Body Housing: Steel, Nickel plated

Terminal:

Port (1): Input Port (2): Output

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	800		2000
Insertion Loss: In-Out (dB)		< 0.70	0.85
Isolation: Out-in (dB)	14.5	> 16	
Return Loss (dB)	14.5	> 16	

Permanent damage to the Device or reduce reliability if exceeding any of

Port (1) and (2): DC connected and floating with the 50 ohm resistance of the internal load as the only ground connection.

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/CW	500/50 Watts	
Reverse PWR Peak/CW	500/20 Watts	
Termination Rating (see note 2)	20 Watts	
Operating Temperature	-0 to +50° C	
Storage Temperature	-40 to +95° C	

Notes

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +50°C Max.

20W ISOLATOR MODEL: RFSL8458

