






	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
В	ADD ISOVIEW	20-003	03/30/20	P.T

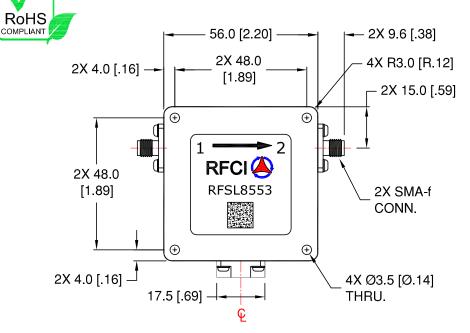

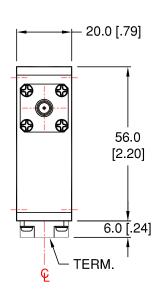



#### Finish:

Body Housing: Steel, Nickel plated

#### Terminal:

Port (1): Input Port (2): Output

# **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1300		2600
Insertion Loss: In-Out (dB)		< 0.50	0.70
Isolation: Out-in (dB)	17	> 19	
Return Loss (dB)	17	> 19	

Permanent damage to the Device or reduce reliability if exceeding any of

Port (1) and (2): DC connected and floating with the 50 ohm resistance of the internal load as the only ground connection.

### Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/CW	500/50 Watts	
Reverse PWR Peak/CW	500/20 Watts	
Termination Rating (see note 2)	20 Watts	
Operating Temperature	-0 to +50° C	
Storage Temperature	-40 to +95° C	

#### Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +50°C Max.

## 20W ISOLATOR MODEL: RFSL8553

**UNLESS OTHERWISE SPECIFIED** ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): RFCI TOLERANCES ARE: 1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° **APPROVALS** DATE 2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5 CHECKED BY: PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE **OUTLINE/SPECS** CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO ENGINEER BY: SIZE CAGE NO. DWG NO. REV. DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL." В SL8553-OS DO NOT SCALE DRAWING SHEET 1 OF 1 SCALE: FULL