DWG. NO.
 CR9134-OS
 SHT REV 1
 REV

 REVISIONS
 BESCRIPTION
 ECO
 DATE
 APPROVED


I.R.

08/18/15

P.T



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

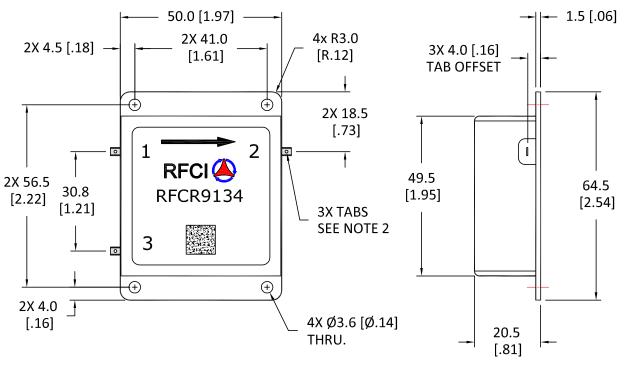

INITIAL RELEASE

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	132		174
Insertion Loss (dB)		< .80	1.0
Isolation (dB)	15	> 16	
Return Loss (dB)	15	> 16	
	•		

Power & Temperature Ratings

Parameter	Maximum
Forward PWR AVG	100 Watts
Reverse Power CW	20 Watts
Operating Temperature	-30 to +80° C
Storage Temperature	-40 to +95° C

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab dimensions: 2.5 [.10]W x 3.0[1.2]L x 0.3[.01]T
- 3. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW CIRCULATOR MODEL: RFCR9134

