DWG. NO.
CR9135-OS
SHT REV
1 A

REVISIONS

REV. DESCRIPTION ECO DATE APPROVED


I.R.

08/18/15

P.T





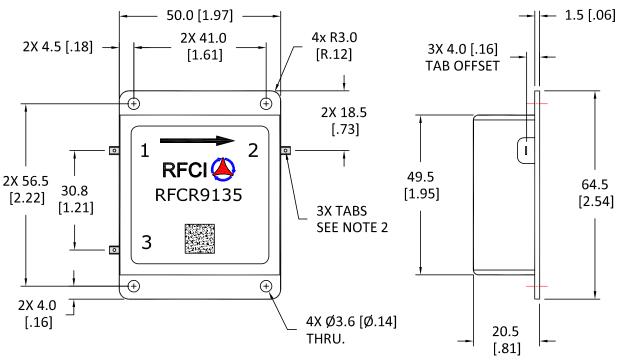

INITIAL RELEASE

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	132		154
Insertion Loss (dB)		< .50	.80
Isolation (dB)	15	> 18	
Return Loss (dB)	15	> 18	

Power & Temperature Ratings

Parameter	Maximum
Forward PWR AVG	150 Watts
Reverse Power CW	100 Watts
Operating Temperature	-30 to +80° C
Storage Temperature	-40 to +95° C

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab dimensions: 2.5 [.10]W x 3.0[1.2]L x 0.3[.01]T
- 3. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW CIRCULATOR MODEL: RFCR9135

