
DWG. NO. SL2914D-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

l		REVISIONS						
I	REV.	DESCRIPTION	ECO	DATE	APPROVED			
	Α	INITIAL RELEASE	I.R.	10/10/15	P.T			



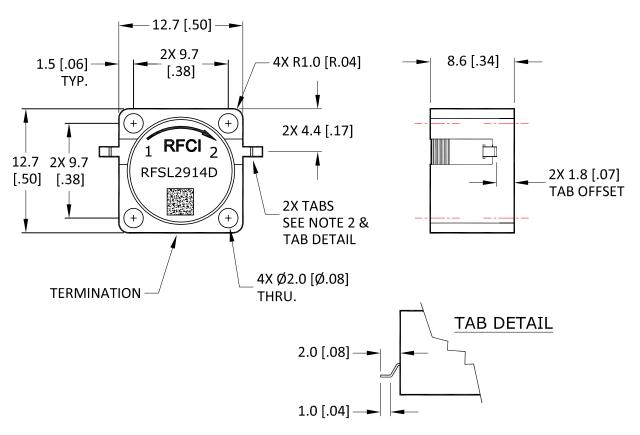

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2700		2900
Insertion Loss (dB)		< .35	.40
Isolation (dB)	19	> 21	
Return Loss (dB)	19	> 21	

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 1.00 [.040]W x 2.0 [.08]L x 0.20 [.008]T
- 3. Isolator Flange held to $+85^{\circ}\text{C}$; 30 Minute Maximum Duration

Power & Temperature Ratings

Parameter	Maximum			
Forward PWR Peak/AVG	500/50 Watts			
Reverse Power CW	5 Watts			
Termination Rating (See Note 3)	5 Watts			
Operating Temperature	-40 to +85° C			
Storage Temperature	-40 to +95° C			

CW ISOLATOR MODEL: RFSL2914D

