

DWG. NO.
SL8919-OS
SHT REV
1 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

| REVISIONS | | | | | | |
|-----------|-----------------|------|----------|----------|--|--|
| REV. | DESCRIPTION | ECO | DATE | APPROVED | | |
| Α | INITIAL RELEASE | I.R. | 04/13/15 | P.T | | |



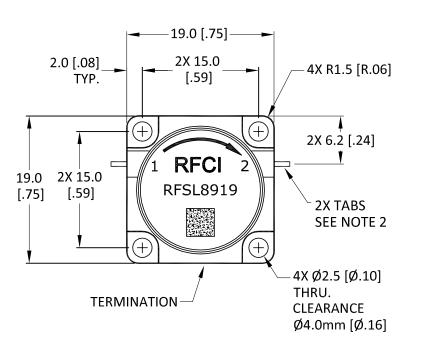



Specifications

| Parameter | Minimum | Typical | Maximum |
|-----------------------|---------|---------|---------|
| Frequency Range (MHz) | 5300 | | 12700 |
| Insertion Loss (dB) | | < .70 | .80 |
| Isolation (dB) | 15 | > 16 | |
| Return Loss (dB) | 15 | > 16 | |

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: $0.60 [.024]W \times 2.0[.08]L \times 0.20[.008]T$
- 3. Isolator Flange held to +85°C Minute Maximum Duration.

Power & Temperature Ratings

| Parameter | Maximum | |
|---------------------------------|---------------|--|
| Forward PWR Peak/AVG | 250/25 Watts | |
| Reverse Power CW | 10 Watts | |
| Termination Rating (See Note 3) | 10 Watts | |
| Operating Temperature | -20 to +85° C | |
| Storage Temperature | -40 to +95° C | |

CW ISOLATOR MODEL: RFSL8919

