DWG. NO.


CR6131B-OS

SHT REV
1 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

|      | REVISIONS       |      |          |          |
|------|-----------------|------|----------|----------|
| REV. | DESCRIPTION     | ECO  | DATE     | APPROVED |
| Α    | INITIAL RELEASE | I.R. | 01/06/16 | P.T      |



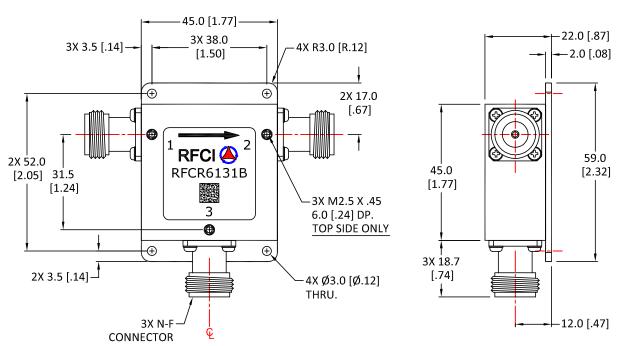

## **Specifications**

| Parameter             | Minimum | Typical | Maximum |
|-----------------------|---------|---------|---------|
| Frequency Range (MHz) | 400     |         | 470     |
| Insertion Loss (dB)   |         | < .40   | .50     |
| Isolation (dB)        | 18      | > 21    |         |
| Return Loss (dB)      | 18      | > 21    |         |

## Power & Temperature Ratings

| Parameter             | Maximum        |
|-----------------------|----------------|
| Forward PWR Peak/AVG  | 2.5K/250 Watts |
| Reverse Power CW      | 250 Watts      |
| Operating Temperature | -20 to +85° C  |
| Storage Temperature   | -40 to +95° C  |

## Notes

- 1. Typical Values Represent Performance @ +23 °C
- 2. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

Nf CIRCULATOR MODEL: RFCR6131B

