DWG. NO.


CR9139N-OS

SHT REV
1 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

| | REVISIONS | | | |
|------|-----------------|------|---------|----------|
| REV. | DESCRIPTION | ECO | DATE | APPROVED |
| Α | INITIAL RELEASE | I.R. | 2/20/15 | P.T |



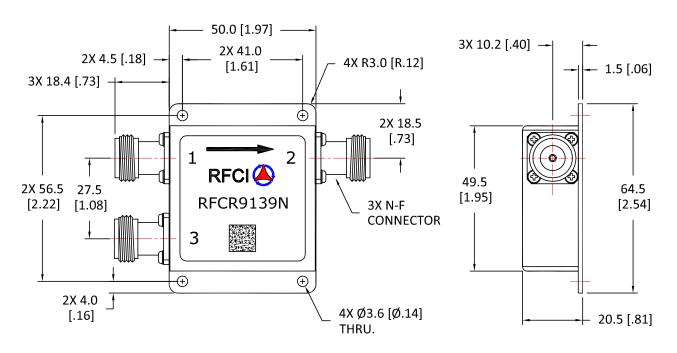

Specifications

| Parameter | Minimum | Typical | Maximum |
|-----------------------|---------|---------|---------|
| Frequency Range (MHz) | 132 | | 154 |
| Insertion Loss (dB) | | < .50 | .80 |
| Isolation (dB) | 15 | > 18 | |
| Return Loss (dB) | 15 | > 18 | |

Power & Temperature Ratings

| Parameter | Maximum |
|-----------------------|---------------|
| Forward PWR AVG | 150 Watts |
| Reverse Power CW | 100 Watts |
| Operating Temperature | -30 to +80° C |
| Storage Temperature | -40 to +95° C |

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW CIRCULATOR MODEL: RFCR9139N

