
DWG. NO.
 SL6127-OS
 SHT
 REV

 1
 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

| REVISIONS |                 |      |          |          |  |  |
|-----------|-----------------|------|----------|----------|--|--|
| REV.      | DESCRIPTION     | ECO  | DATE     | APPROVED |  |  |
| Α         | INITIAL RELEASE | I.R. | 12/20/15 | P.T      |  |  |



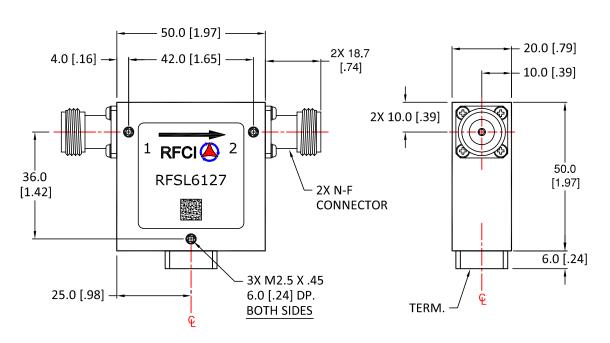

## **Specifications**

| Parameter             | Minimum | Typical | Maximum |
|-----------------------|---------|---------|---------|
| Frequency Range (MHz) | 325     |         | 400     |
| Insertion Loss (dB)   |         | < .40   | .50     |
| Isolation (dB)        | 18      | > 21    |         |
| Return Loss (dB)      | 18      | > 21    |         |

## Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +85°C; 30 Minute maximum Duration.

## Power & Temperature Ratings

| Parameter                       | Maximum        |  |
|---------------------------------|----------------|--|
| Forward PWR Peak/AVG            | 2.0K/250 Watts |  |
| Reverse Power CW                | 20 Watts       |  |
| Termination Rating (See Note 2) | 20 Watts       |  |
| Operating Temperature           | -20 to +85° C  |  |
| Storage Temperature             | -40 to +95° C  |  |

20W N-f ISOLATOR MODEL: RFSL6127

