DWG. NO.


SL9123N-OS

SHT REV
1 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

| REVISIONS | | | | | | |
|-----------|-----------------|------|----------|----------|--|--|
| REV. | DESCRIPTION | ECO | DATE | APPROVED | | |
| Α | INITIAL RELEASE | I.R. | 12/23/15 | P.T | | |



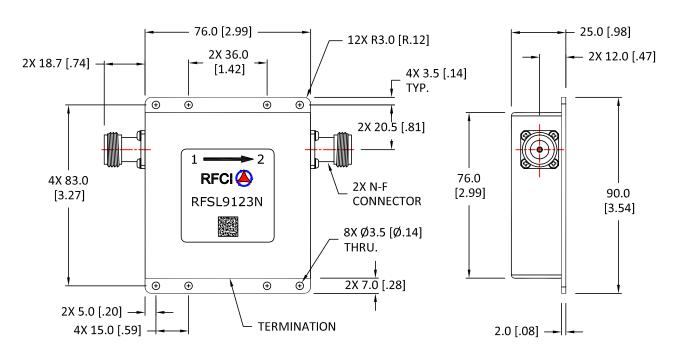

Specifications

| Parameter | Minimum | Typical | Maximum |
|-----------------------|---------|---------|---------|
| Frequency Range (MHz) | 54 | | 60 |
| Insertion Loss (dB) | | < .80 | 1.0 |
| Isolation (dB) | 17 | > 19 | |
| Return Loss (dB) | 17 | > 19 | |

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +60°C; 30 Minute maximum Duration.

Power & Temperature Ratings

| Parameter | Maximum | |
|---------------------------------|---------------|--|
| Forward PWR AVG | 100 Watts | |
| Reverse Power CW | 50 Watts | |
| Termination Rating (See Note 2) | 100 Watts | |
| Operating Temperature | -0 to +60° C | |
| Storage Temperature | -40 to +95° C | |

CW ISOLATOR MODEL: RFSL9123N

