DWG. NO.


SL9129N-OS

SHT REV
1 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

l		REVISIONS			
Ī	REV.	DESCRIPTION	ECO	DATE	APPROVED
	Α	INITIAL RELEASE	I.R.	12/23/15	P.T



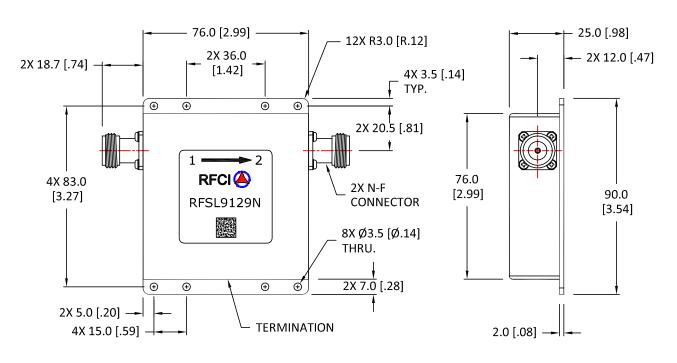

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	118		144
Insertion Loss (dB)		< .80	1.0
Isolation (dB)	17	> 18	
Return Loss (dB)	17	> 18	

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +60°C; 30 Minute maximum Duration.

Power & Temperature Ratings

Parameter	Maximum
Forward PWR AVG	100 Watts
Reverse Power CW	50 Watts
Termination Rating (See Note 2)	100 Watts
Operating Temperature	-0 to +60° C
Storage Temperature	-40 to +95° C

CW ISOLATOR MODEL: RFSL9129N

