

07/20/14


P.T

I.R.



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL

ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

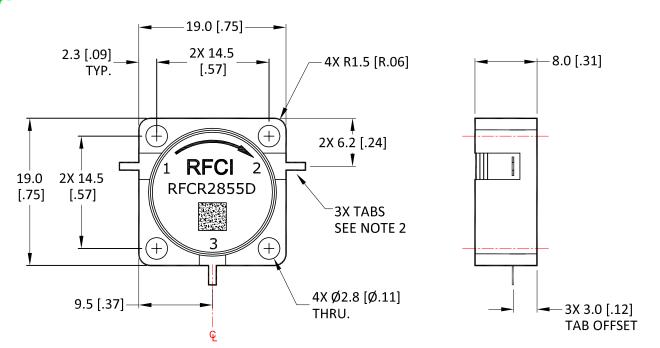

INITIAL RELEASE

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2700		2900
Insertion Loss (dB)		< .20	.30
Isolation (dB)	22	> 25	
Return Loss (dB)	22	> 25	

## -----

- Notes:
  1. Typical Values Represent Performance @ +23 °C.
  - 2. Tab Dimensions: 1.00 [.040]W x 2.5[.10]L x 0.20[.008]T
  - S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

## Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	1000/100 Watts		
Reverse Power CW	100 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

CW CIRCULATOR MODEL: RFCR2855D

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION	+	DECI			<b>1</b>	
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° 2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS 16/	APPROVALS	DATE			TUI 🦞		
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY:						
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI 940.1	CHECKED BY:		TITLE				
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:		OUTLINE/SPECS				
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY:						
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	MFG. ENGR.		SIZE	CAGE NO.		IREV.	
	Q.A.			OAGE NO.		OEED OC	_
	PROG. MGMT/MKT		Α		CR2855[	)-05	
DO NOT SCALE DRAWING			SCALI	E: FULL		SHEET 1 OF 1	