



07/20/14

I.R.

P.T



ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.	REV.	DESC		
DO NOT REVISE MANOALLY.	Α	INITIAL RELEASE		
RoHS				

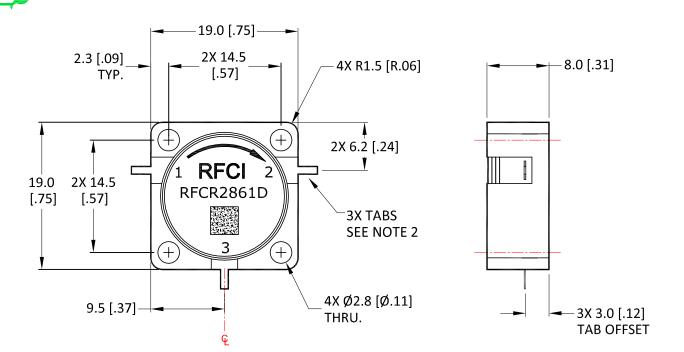

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	3300		3800
Insertion Loss (dB)		< .25	.35
Isolation (dB)	20	> 23	
Return Loss (dB)	20	> 23	

- Notes: 1. Typical Values Represent Performance @ +23 °C.
 - 2. Tab Dimensions: $1.00 [.040]W \times 2.5[.10]L \times 0.20[.008]T$
 - 3. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	1000/100 Watts		
Reverse Power CW	100 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

CW CIRCULATOR MODEL: RFCR2861D

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION		RECI (A)				
1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° SURFACE ROUGHNESS 16	APPROVALS	DATE					
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY:						
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI 846.1	CHECKED BY:		TITLE				
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY:		OUTLINE/SPECS				
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY:						
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR.		SIZE	CAGE NO.	DWG NO.		IREV.
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.		<u> </u>	CAGE NO.		001D OC	
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		A		UR28	861D-OS	A
DO NOT SCALE DRAWING			SCALE	: FULL		SHEET 1 OF	1