



DWG. NO.

REV



THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL



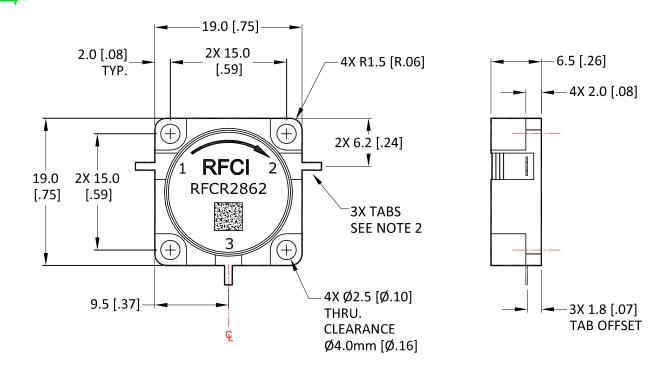

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	3400		3700
Insertion Loss (dB)		< .20	.30
Isolation (dB)	22	> 25	
Return Loss (dB)	22	> 25	

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 1.00 [.040]W x 2.5[.10]L x 0.20[.008]T
- 3. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	1000/100 Watts	
Reverse Power CW	100 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

CW CIRCULATOR MODEL: RFCR2862

