DWG. NO.

CR2917-OS


REVISIONS

REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

| REVISIONS |                 |      |          |          |  |
|-----------|-----------------|------|----------|----------|--|
| REV.      | DESCRIPTION     | ECO  | DATE     | APPROVED |  |
| Α         | INITIAL RELEASE | I.R. | 10/11/15 | P.T      |  |



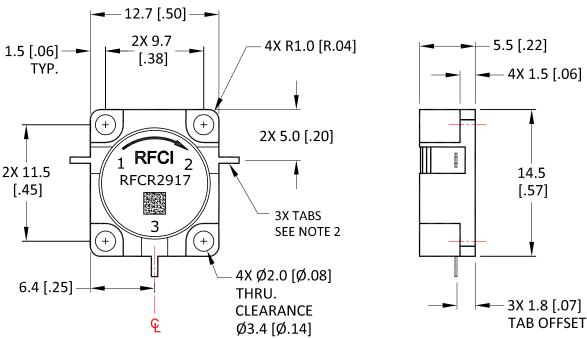

## **Specifications**

| Parameter             | Minimum | Typical | Maximum |
|-----------------------|---------|---------|---------|
| Frequency Range (MHz) | 4000    |         | 4700    |
| Insertion Loss (dB)   |         | < .30   | .35     |
| Isolation (dB)        | 20      | > 23    |         |
| Return Loss (dB)      | 20      | > 23    |         |

## Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 0.62 [.024]W x 2.0 [.08]L x 0.20 [.008]T
- S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

## Power & Temperature Ratings

| Parameter             | Maximum       |  |
|-----------------------|---------------|--|
| Forward PWR Peak/AVG  | 500/50 Watts  |  |
| Reverse Power CW      | 35 Watts      |  |
| Operating Temperature | -40 to +85° C |  |
| Storage Temperature   | -40 to +95° C |  |

CW CIRCULATOR MODEL: RFCR2917

