


THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

| REVISIONS |                 |      |          |          |
|-----------|-----------------|------|----------|----------|
| REV.      | DESCRIPTION     | ECO  | DATE     | APPROVED |
| A         | INITIAL RELEASE | I.R. | 10/25/15 | P.T      |

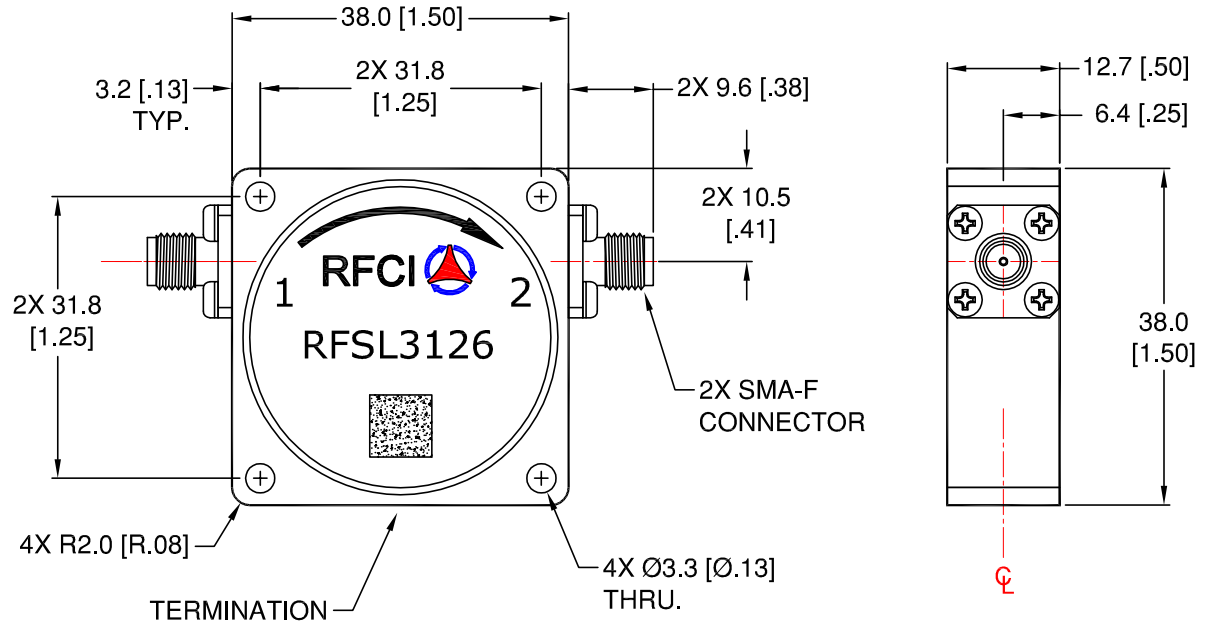

### Specifications

| Parameter             | Minimum | Typical | Maximum |
|-----------------------|---------|---------|---------|
| Frequency Range (MHz) | 520     |         | 576     |
| Insertion Loss (dB)   |         | < .30   | .40     |
| Isolation (dB)        | 20      | > 22    |         |
| Return Loss (dB)      | 20      | > 22    |         |

- Notes:
1. Typical Values Represent Mid-Band Performance @ +23 °C.
  2. Isolator Flange held to +85°C; 30 Minute maximum Duration.

### Power & Temperature Ratings

| Parameter                       | Maximum        |
|---------------------------------|----------------|
| Forward PWR Peak/AVG            | 1000/200 Watts |
| Reverse Power CW                | 20 Watts       |
| Termination Rating (See Note 2) | 20 Watts       |
| Operating Temperature           | -20 to +85° C  |
| Storage Temperature             | -40 to +95° C  |

### CW 20W SMA-f ISOLATOR MODEL RFSL3126

|   |                            |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
|---|----------------------------|--|------------------------------|-----------------------|-------------------------------|--|-----------|------|-----------|--|-------------|--|------------|--|--------------|--|------------|--|------|--|----------------|--|--|
| <p>UNLESS OTHERWISE SPECIFIED<br/>ALL DIMENSIONS ARE IN MILLIMETERS (INCHES):</p> <p>TOLERANCES ARE:</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;">1 PLACE DECIMAL ±.2 [±.01]</td> <td style="border: none;">ANGULAR: ±1.0°</td> </tr> <tr> <td style="border: none;">2 PLACE DECIMAL ±.10 [±.004]</td> <td style="border: none;">SURFACE ROUGHNESS 16/</td> </tr> </table> <p>REMOVE ALL BURRS AND BREAK SHARP EDGES.<br/>SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1<br/>DIMENSIONING &amp; TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5</p> <p>PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RF CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.<br/>THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."</p> <p>DO NOT SCALE DRAWING</p> | 1 PLACE DECIMAL ±.2 [±.01] | ANGULAR: ±1.0°   | 2 PLACE DECIMAL ±.10 [±.004] | SURFACE ROUGHNESS 16/ | <p>THIRD ANGLE PROJECTION</p> | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">APPROVALS</td> <td style="width: 50%;">DATE</td> </tr> <tr> <td>DRAWN BY:</td> <td></td> </tr> <tr> <td>CHECKED BY:</td> <td></td> </tr> <tr> <td>DESIGN BY:</td> <td></td> </tr> <tr> <td>ENGINEER BY:</td> <td></td> </tr> <tr> <td>MFG. ENGR.</td> <td></td> </tr> <tr> <td>Q.A.</td> <td></td> </tr> <tr> <td>PROG. MGMT/MKT</td> <td></td> </tr> </table> | APPROVALS | DATE | DRAWN BY: |  | CHECKED BY: |  | DESIGN BY: |  | ENGINEER BY: |  | MFG. ENGR. |  | Q.A. |  | PROG. MGMT/MKT |  | <h1 style="font-size: 2em; margin: 0;">RFCI</h1> <h2 style="font-size: 1.5em; margin: 0;">OUTLINE/SPECS</h2> |
| 1 PLACE DECIMAL ±.2 [±.01]  | ANGULAR: ±1.0°             |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
| 2 PLACE DECIMAL ±.10 [±.004]  | SURFACE ROUGHNESS 16/      |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
| APPROVALS   | DATE                       |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
| DRAWN BY:   |                            |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
| CHECKED BY:   |                            |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
| DESIGN BY:  |                            |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
| ENGINEER BY:  |                            |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
| MFG. ENGR.  |                            |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
| Q.A.  |                            |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
| PROG. MGMT/MKT  |                            |  |                              |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
|   |                            |  | <p>TITLE</p>                 |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
|   |                            | <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">SIZE<br/><b>A</b></td> <td style="width: 25%;">CAGE NO.</td> <td style="width: 25%;">DWG NO.<br/><b>SL3126-OS</b></td> <td style="width: 25%;">REV.<br/><b>A</b></td> </tr> </table> | SIZE<br><b>A</b>             | CAGE NO.              | DWG NO.<br><b>SL3126-OS</b>   | REV.<br><b>A</b>   |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
| SIZE<br><b>A</b>  | CAGE NO.                   | DWG NO.<br><b>SL3126-OS</b>  | REV.<br><b>A</b>             |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |
|   |                            | <p>SCALE: FULL</p>   | <p>SHEET 1 OF 1</p>          |                       |                               |  |           |      |           |  |             |  |            |  |              |  |            |  |      |  |                |  |  |