
DWG. NO.
 SHT
 REV

 1
 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

| REVISIONS | | | | | | |
|-----------|-----------------|------|----------|----------|--|--|
| REV. | DESCRIPTION | ECO | DATE | APPROVED | | |
| Α | INITIAL RELEASE | I.R. | 01/06/16 | P.T | | |



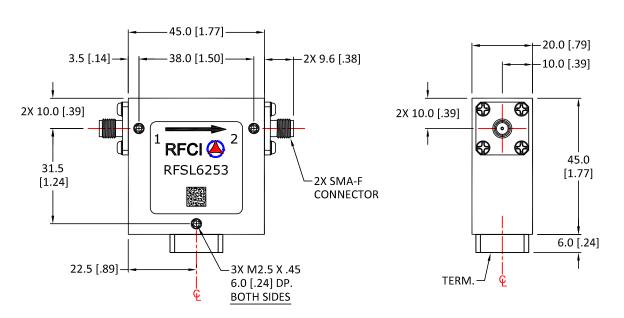

Specifications

| Parameter | Minimum | Typical | Maximum |
|-----------------------|---------|---------|---------|
| Frequency Range (MHz) | 800 | | 960 |
| Insertion Loss (dB) | | < .40 | .50 |
| Isolation (dB) | 20 | > 22 | |
| Return Loss (dB) | 20 | > 22 | |

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +85°C; 30 Minute maximum Duration.

Power & Temperature Ratings

| Parameter | Maximum | |
|-----------------------|----------------|--|
| Forward PWR Peak/AVG | 2.0K/200 Watts | |
| Reverse Power CW | 20 Watts | |
| Reverse Power CW | 20 Watts | |
| Operating Temperature | -20 to +85° C | |
| Storage Temperature | -40 to +95° C | |

20W SMA-f ISOLATOR MODEL: RFSL6253

