

DWG. NO. SL6358-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

| | REVISIONS | | | | | | |
|------|-----------------|------|----------|----------|--|--|--|
| REV. | DESCRIPTION | ECO | DATE | APPROVED | | | |
| Α | INITIAL RELEASE | I.R. | 01/06/16 | P.T | | | |



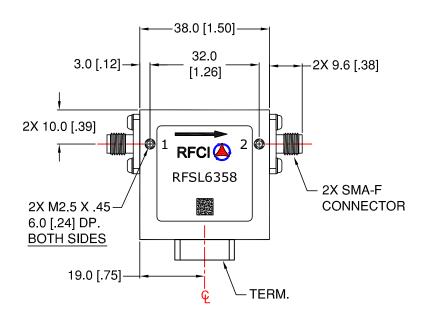

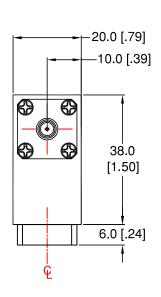

Specifications

| Parameter | Minimum | Typical | Maximum |
|-----------------------|---------|---------|---------|
| Frequency Range (MHz) | 940 | | 1200 |
| Insertion Loss (dB) | | < .40 | .50 |
| Isolation (dB) | 18 | > 20 | |
| Return Loss (dB) | 18 | > 20 | |

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to $+85^{\circ}\text{C}$; 30 Minute maximum Duration.

Power & Temperature Ratings

| Parameter | Maximum | |
|---------------------------------|----------------|--|
| Forward PWR Peak/AVG | 2.0K/200 Watts | |
| Reverse Power CW | 20 Watts | |
| Termination Rating (See Note 2) | 20 Watts | |
| Operating Temperature | -20 to +85° C | |
| Storage Temperature | -40 to +95° C | |

20W SMA-f ISOLATOR MODEL: RFSL6358

