
DWG. NO. SL6457-T200-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
Α	INITIAL RELEASE	I.R.	01/06/16	P.T



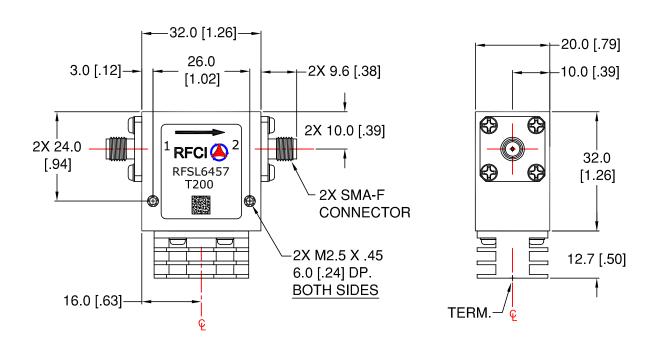

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1600		2000
Insertion Loss (dB)		< .40	.50
Isolation (dB)	18	> 20	
Return Loss (dB)	18	> 20	

Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +85°C; 30 Minute maximum Duration.

Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	2.0K/200 Watts		
Reverse Power CW	200 Watts		
Termination Rating (See Note 2)	200 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

200W SMA-f ISOLATOR MODEL: RFSL6457-T200

