
DWG. NO.
 SL6851-OS
 SHT
 REV

 1
 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS					
RE	EV.	DESCRIPTION	ECO	DATE	APPROVED	
A	4	INITIAL RELEASE	I.R.	01/05/16	P.T	



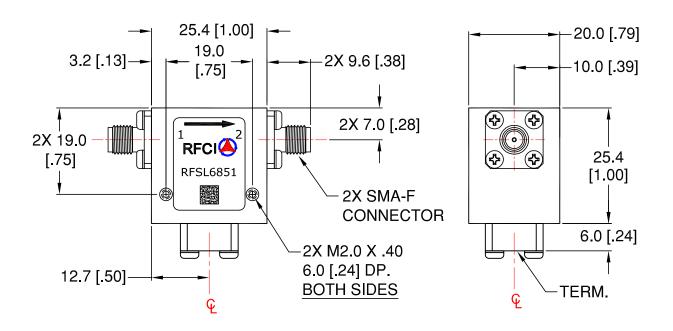

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2100		2600
Insertion Loss (dB)		< .30	.40
Isolation (dB)	20	> 23	
Return Loss (dB)	20	> 23	

## Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +85°C; 30 Minute maximum Duration.

## Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	2.0K/200 Watts	
Reverse Power CW	20 Watts	
Termination Rating (See Note 2)	20 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

20W SMA-f ISOLATOR MODEL: RFSL6851

