
DWG. NO.
 CR6177-OS
 SHT
 REV

 1
 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS					
REV.	DESCRIPTION	ECO	DATE	APPROVED		
Α	INITIAL RELEASE	I.R.	11/15/15	P.T		



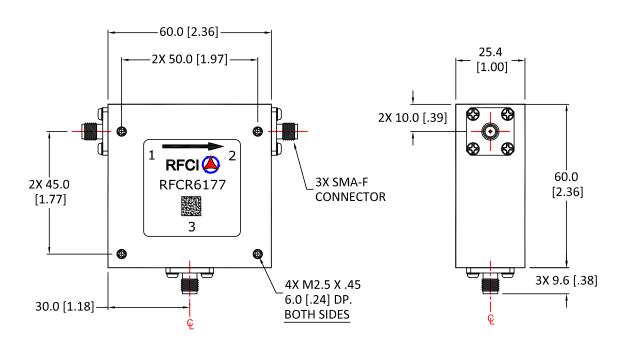

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	220		280
Insertion Loss (dB)		< .50	.70
Isolation (dB)	17	> 19	
Return Loss (dB)	17	> 19	

## Power & Temperature Ratings

Parameter	Maximum
Forward PWR Peak/AVG	2.5K/250 Watts
Reverse Power CW	250 Watts
Operating Temperature	-20 to +85° C
Storage Temperature	-40 to +95° C

## Notes:

- 1. Typical Values Represent Performance @ +23 °C
- S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

## SMA-f CIRCULATOR MODEL: RFCR6177

