
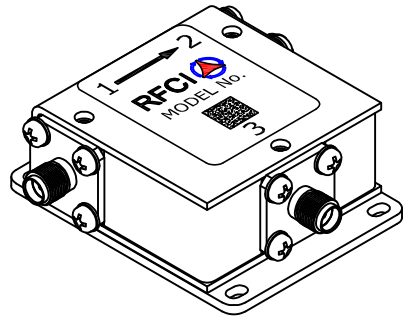
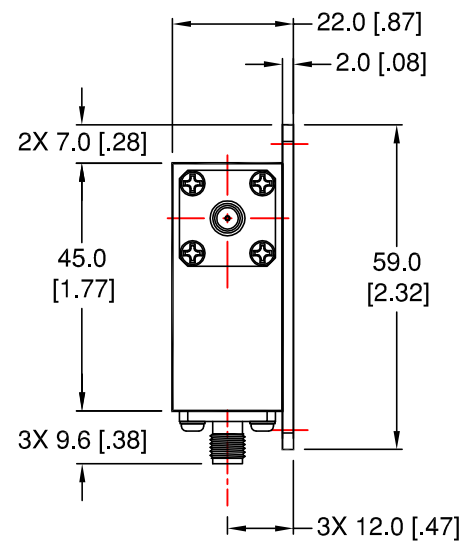


THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

| REVISIONS | | | |
|-----------|-------------|--------|--------------|
| REV. | DESCRIPTION | ECO | DATE |
| B | ADD ISOVIEW | 20-003 | 03/30/20 |
| | | | APPROVED P.T |

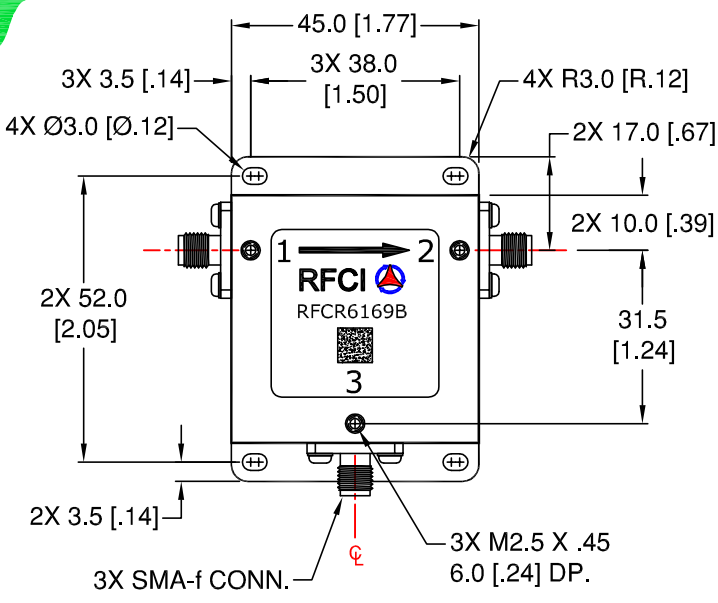

Finish:
Body Housing: Nickel plated

Terminal:
Port (1)-(2): Input-Output
Port (2)-(3): Input-Output
Port (3)-(1): Input-Output

Specifications

| Parameter | Minimum | Typical | Maximum |
|-----------------------------|---------|---------|---------|
| Frequency Range (MHz) | 700 | | 1000 |
| Insertion Loss: In-Out (dB) | | < 0.50 | 0.60 |
| Isolation: Out-In (dB) | 16.5 | > 17 | |
| Return Loss (dB) | 16.5 | > 17 | |

Permanent damage to the Device or reduce reliability if exceeding any of the limits.
Port (1),(2)and (3): DC connected and floating as the only ground connection.

Power & Temperature Ratings

| Parameter | Maximum |
|--------------------------------|----------------|
| Fwd Power Peak/CW | 2.5K/250 Watts |
| Rev Power Peak/CW (see note 2) | 2.5K/250 Watts |
| Operating Temperature | -20 to +85° C |
| Storage Temperature | -40 to +95° C |

Notes:
1. Typical Values Represent Performance @ +23 °C
2. Body Flange held to +85°C Max.
3. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

SMA-f CIRCULATOR MODEL: RFCR6169B

| | | | | | |
|---|---|-----------------------------|-----------------|---------------------------|---------------|
| <p>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]:</p> <p>TOLERANCES ARE: 1 PLACE DECIMAL ±.2 [±.01] ANGULAR: ±1.0° 2 PLACE DECIMAL ±.10 [±.004] SURFACE ROUGHNESS 16/</p> <p>REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1 DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5</p> <p>PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RF CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."</p> | <p>THIRD ANGLE PROJECTION</p> | <p>RFCI </p> | | | |
| | <p>APPROVALS</p> <p>DATE</p> | | | <p>DATE</p> | |
| <p>DO NOT SCALE DRAWING</p> | <p>DRAWN BY:</p> <p>CHECKED BY:</p> <p>DESIGN BY:</p> <p>ENGINEER BY:</p> <p>MFG. ENGR.</p> <p>Q.A.</p> <p>PROG. MGMT/MKT</p> | <p>OUTLINE/SPECS</p> | | | |
| <p>SCALE: FULL</p> | | <p>SIZE A</p> | <p>CAGE NO.</p> | <p>DWG NO. CR6169B-OS</p> | <p>REV. B</p> |
| | | | | <p>SHEET 1 OF 1</p> | |