


THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

	REVISIONS			
REV.	DESCRIPTION	ECO	DATE	APPROVED
Α	INITIAL RELEASE	I.R.	08/22/15	P.T



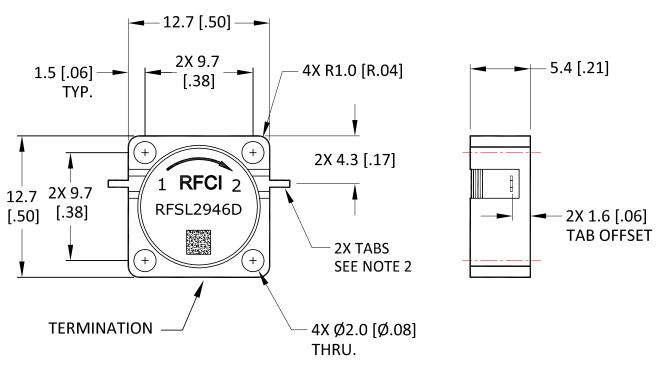

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	9000		11000
Insertion Loss (dB)		< .45	.50
Isolation (dB)	19	> 22	
Return Loss (dB)	19	> 22	

## Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: 0.62 [.024]W x 2.0 [.08]L x 0.20 [.008]T
- 3. Isolator Flange held to +85°C; 30 Minute Maximum Duration

## Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	500/35 Watts	
Reverse Power CW	5 Watts	
Termination Rating (See Note 3)	10 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

CW 10W ISOLATOR MODEL: RFSL2946D

