




THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL



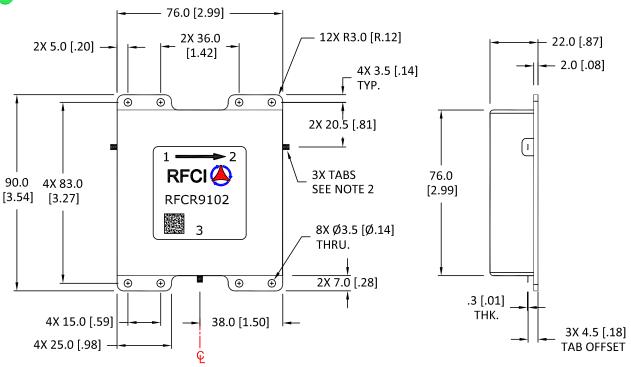

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	118		144
Insertion Loss (dB)		< .80	1.0
Isolation (dB)	17	> 18	
Return Loss (dB)	17	> 18	

Power & Temperature Ratings

Parameter	Maximum
Forward PWR AVG	200 Watts
Reverse Power CW	100 Watts
Operating Temperature	-0 to +60° C
Storage Temperature	-40 to +95° C

Notes:

- 1. Typical Values Represent Performance @ +23 °C
- 2. Tab Dimensions: 2.5 [.10]W x 3.0[.12]L x 0.30[.010]T
- 3. S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW CIRCULATOR MODEL: RFCR9102

