DWG. NO.


SL6357-OS

SHT REV
1 A

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

l		REVISIONS						
I	REV.	DESCRIPTION	ECO	DATE	APPROVED			
	Α	INITIAL RELEASE	I.R.	01/06/16	P.T			



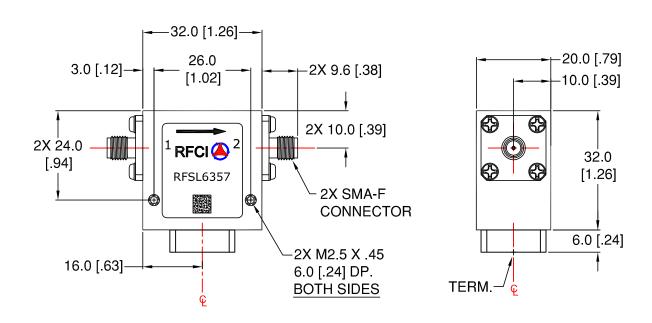

## **Specifications**

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1200		1450
Insertion Loss (dB)		< .40	.50
Isolation (dB)	20	> 22	
Return Loss (dB)	20	> 22	

## Notes:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Isolator Flange held to +85°C; 30 Minute maximum Duration.

## Power & Temperature Ratings

Parameter	Maximum	
Forward PWR Peak/AVG	2.0K/200 Watts	
Reverse Power CW	20 Watts	
Termination Rating (See Note 2)	20 Watts	
Operating Temperature	-40 to +85° C	
Storage Temperature	-40 to +95° C	

20W SMA-f ISOLATOR MODEL: RFSL6357

